




SKY6

dBlux Signal System


[info@dbluxsignal.com](mailto:info@dbluxsignal.com)

[www.dbluxsignal.com](http://www.dbluxsignal.com)

## WIRING - SINGLE COLOR

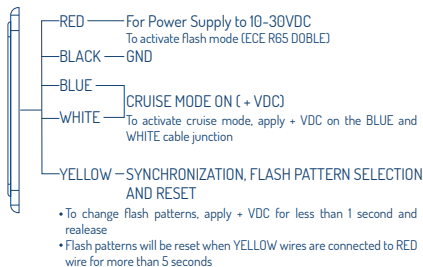

## DIMENSION



## FLASH PATTERNS

<b>1</b>	ECE R65 Double (All)	<b>11</b>	Single-Quint (All)
<b>2</b>	ECE R65 Single (All)	<b>12</b>	Single (All)
<b>3</b>	Flash Pattern SAE	<b>13</b>	Double (All)
<b>4</b>	Random	<b>14</b>	Quad (All)
<b>5</b>	Single (Split)	<b>15</b>	Quint (All)
<b>6</b>	Double (Split)	<b>16</b>	Ultra (All)
<b>7</b>	Quad (Split)	<b>17</b>	Single-Quad (All)
<b>8</b>	Quint (Split)	<b>18</b>	Single-H/L (All)
<b>9</b>	Ultra (Split)	<b>19</b>	Steady 2 (California)
<b>10</b>	Single-Quad (Split)		Steady 4 (All)


## WIRING - DUAL COLOR



## MOUNTING

Adhesive Mount

Bolt Mount

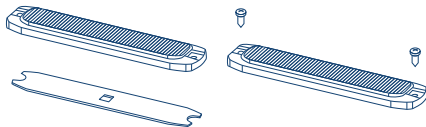

### LIGHT CHARACTERISTICS

Led Power: 6 pcs of 3W

Lens: Fresnel Lens

### ELECTRICAL CHARACTERISTICS

Voltage: DC 10-33V.

Max Power: 9W

### PHYSICAL CHARACTERISTICS

Color Available: A/B/R/W/BR/BA.

Ambient Temperature: -30°C/70°C.

Mounting: Bolt or Adhesive Mount.

Flash Patterns: 19

Certified: ECE R65, ECE R10, SAE J595 CA T13

Dimensions: 119.5mm X 25.5mm X 7mm